

ACOUSTIC FOAM

Sound Protection For Building Assemblies

Description

Acoustic Foam is compressible sound protection foam for building assemblies in head of wall, wall to wall and bottom of wall joint applications both dynamic and static.

Applications

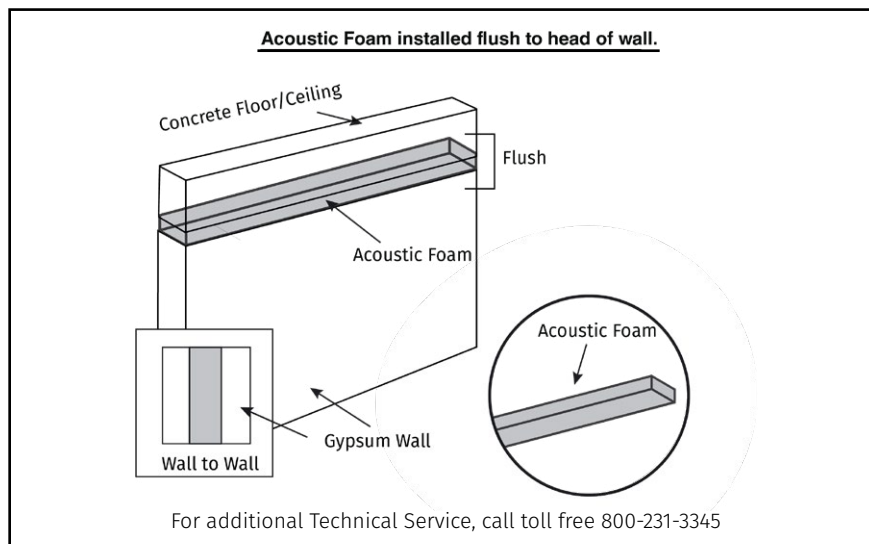
Acoustic Foam is installed on dynamic and static joints for head of wall, wall to wall, and bottom of wall. Designed for installation within joints. Acoustic Foam provides dynamic movement with up to 75% compression and 100% extension capabilities for max joint width range between 1/4 to 1 inch.

Packaging

Code	Size	Qty. per Case
66361	48" x 5/8" x 1 1/2"	80

Characteristics | Features

- Up to 75% compression
- 100% extension capabilities
- Dynamic movement

**Installation Data**

Acoustic Foam is simple to install for head of wall applications. Compress the Acoustic Foam into the joint between the top of the wall and bottom of the deck. The Acoustic Foam can be recessed into the joint or installed flush with the outside surface of the wall. Joints are butted together. No mechanical fastening of the Acoustic Foam is required.

Testing Data

L Rating < 1 CFM/LF

Inspection & Repair

RectorSeal recommends inspection is conducted during the installation of the material. In the event post-installation inspection and destructive sampling are necessary, RectorSeal advises repairing the damaged material system by replacing any material that was removed or damaged with the same product originally installed, and ensuring the assembly matches the original.

Storage & Handling

Acoustic Foam should be stored in a cool, dry place between 0°F (-18°C) to 120°F (49°C) to obtain a 10-year shelf life. Keep products stored under a protective cover in their original containers. A stock rotation program is recommended.

Limitations

To be used only as recommended by RectorSeal. Acoustic Foam is not used in joints that require movement greater than 1".

Material Properties

Asbestos Fillers	None
Solvents	None
Hazardous Ingredients	None
Color	Charcoal
Storage	0°F -120°F -18°C -49°C

Limited Warranty

RectorSeal, LLC makes the Limited Express Warranty that when the instructions for storage and handling of our products are followed we warrant our products to be free from defects. THIS LIMITED EXPRESS WARRANTY IS EXPRESSLY IN LIEU OF ANY OTHER EXPRESS OR IMPLIED WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, AND OF ANY OTHER OBLIGATION ON THE PART OF RectorSeal, LLC. The sole remedy for breach of the Limited Express Warranty shall be the refund of the purchase price. All other liability is negated and disclaimed, and RectorSeal, LLC shall not be liable for incidental or consequential damages.



INTERNATIONAL FIRESTOP COUNCIL
THE Source of Firestop Expertise®

MEMBER

Manufactured by **RectorSeal LLC • 2601 Spenwick Drive, Houston, TX 77055, USA • 800-231-3345 • Fax 800-441-0051 • RectorSeal.com**

A CSW Industrials Company. RectorSeal, the logos and other trademarks are property of RectorSeal, LLC, its affiliates or its licensor's and are protected by copyright, trademark and other intellectual property laws, and may not be used without permission. RectorSeal reserves the right to change specifications without prior notice. ©2019 RectorSeal. All rights reserved. R50464-0819